



Sealed-Blok™
Self-Retracting Lifelines

Trusted.
Durable.
Reliable.

SRL with Field Proven
Technology, RSQ™ Feature
& Retrieval Capabilities

www.3M.com/FallProtection

Trusted.

DBI-SALA® continues to set the standard for quality in fall protection. The 3M™ DBI-SALA® Sealed-Blok™ family has a comprehensive line of sealed SRLs and decades of proven field service.

The best just got better...

Durable.

- Stands up to the harshest environments
- Heavy-duty design
 - Corrosion resistant
 - Stainless steel end-plates
 - Aluminium housing
- No brake adjustment or servicing required after a fall arrest - a simple replacement of the fast-line cable is all that is required.

Reliable.

- Dynamic components sealed inside the housing (IP69K rated).
 - Protects from particles entering product
 - Protected against complete or continuous submersion in water
- Decades of service
- Field proven in the world's toughest environments
- Design extends maintenance intervals and product longevity.

Typical applications.

- Offshore platform access
- Confined space
- Saltwater environments
- Dirty environments.

Typical markets.

- Oil and gas
- Off-shore wind energy*
- Mining
- Marine
- Utilities
- Waste water treatment
- Municipalities.



Anti-Ratcheting Design

Ensures efficient, safe operation under all working conditions - the only SRL to meet IP69K sealed rating.

141 kg Weight Capacity

Higher capacity for operator and tools.

Carrying Handle

Built-in design for easy transport with improved ergonomics.

Secondary Anchorage Point

Certified for “dropped objects” Protection Rated for fall arrest if primary anchor fails.

Retrieval Winch

3M™ DBI-SALA® Sealed-Blok™ Self Retracting Lifeline - RSQ™ Dual Mode Design

Allows user to select between fall arrest mode and descent mode.

5 mm Diameter Wire Rope

Stainless steel for corrosion resistance.

Self-Locking Swivel Hook

Limits lifeline twisting.

Pivoting Anchorage Loop

Centres the load.

Aluminium Housing

Provides exceptional strength, durability and corrosion resistance.

Stainless Steel End-Plate

Durable construction for harsh environments.

Tripod/Davit Arm Bracket

No tools required for install.

Ergonomic Cable Handle

Provides added comfort and ease-of-use when making connections.

Galvanised and Stainless Steel Cable

Abrasion resistant and corrosion resistant lifeline options.

3M™ DBI-SALA® FAST-Line™


Provides the user with ability to replace the lifeline in the field. Eliminates the need to service / reset the brake after a fall arrest.

Impact Indicator

Provides visual indication of Fall Arrest.

1630 kg (3600 lb) Gate

Reduces chances of accidental disengagement (“roll-out”).

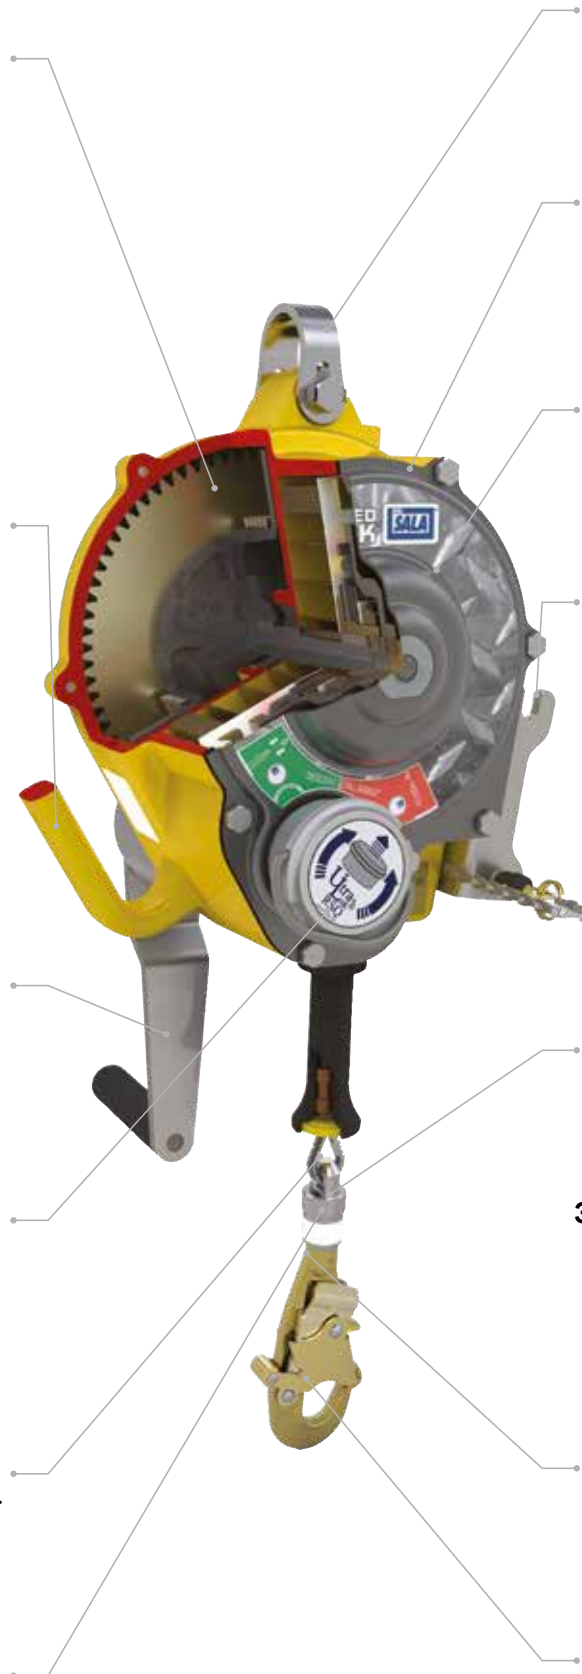

World's first dual-mode self-retracting lifeline fall arrest and rescue.

Dual-mode design provides both fall arrest with assisted rescue capabilities and automatic self rescue for ultimate versatility.

- Built-in Rescue Device becomes an integral part of a Rescue Plan
- Standard fall arrest mode
- Automatic rescue mode
- Remote/Assisted activation.

Choose your mode.



Fall Arrest Mode/Assisted Rescue

A speed sensing brake stops the fall, reduces forces imposed on the user to safe levels of 6 kN or less and allows for assisted rescue to take place.



Automatic Rescue Mode/Self Rescue Descent

A speed sensing brake slows the fall, then instantly a centrifugal brake activates, lowering the user at a controlled speed to the next level or ground.

Assisted Rescue Options 'Engage' The Descent Mode

Traditional assisted rescue operations may also be conducted.



Fall Arrest Mode
Assisted Rescue by Hand



Fall Arrest Mode
Assisted Rescue by Hand



Automatic Descent Mode
Self Rescue Descent

Confined space? No problem.

The mechanical device is one of the most critical parts of a rescue system. It provides the means to retrieve an incapacitated worker to safety. Lifeline type and length are just a few of the options. A 3-way retrieval SRL can be used as either a primary or secondary device depending upon your application.

3-Way Retrieval SRL's

Features:


- Raise and lower personnel
- Simple change in/out of Retrieval
- Stow away handle
- Optional bracket for davit attachment
- Available with RSQ™ Option
- For rescue use only.



Fast-Line™ Field Replaceable Lifeline Models

Features:

- Provides trained End-Users with the ability to replace lifeline
- SRL will not operate if rebuilt improperly
- No need to break seal to replace lifeline
- Lowers overall cost of ownership RSQ™ Option
- For rescue use only.

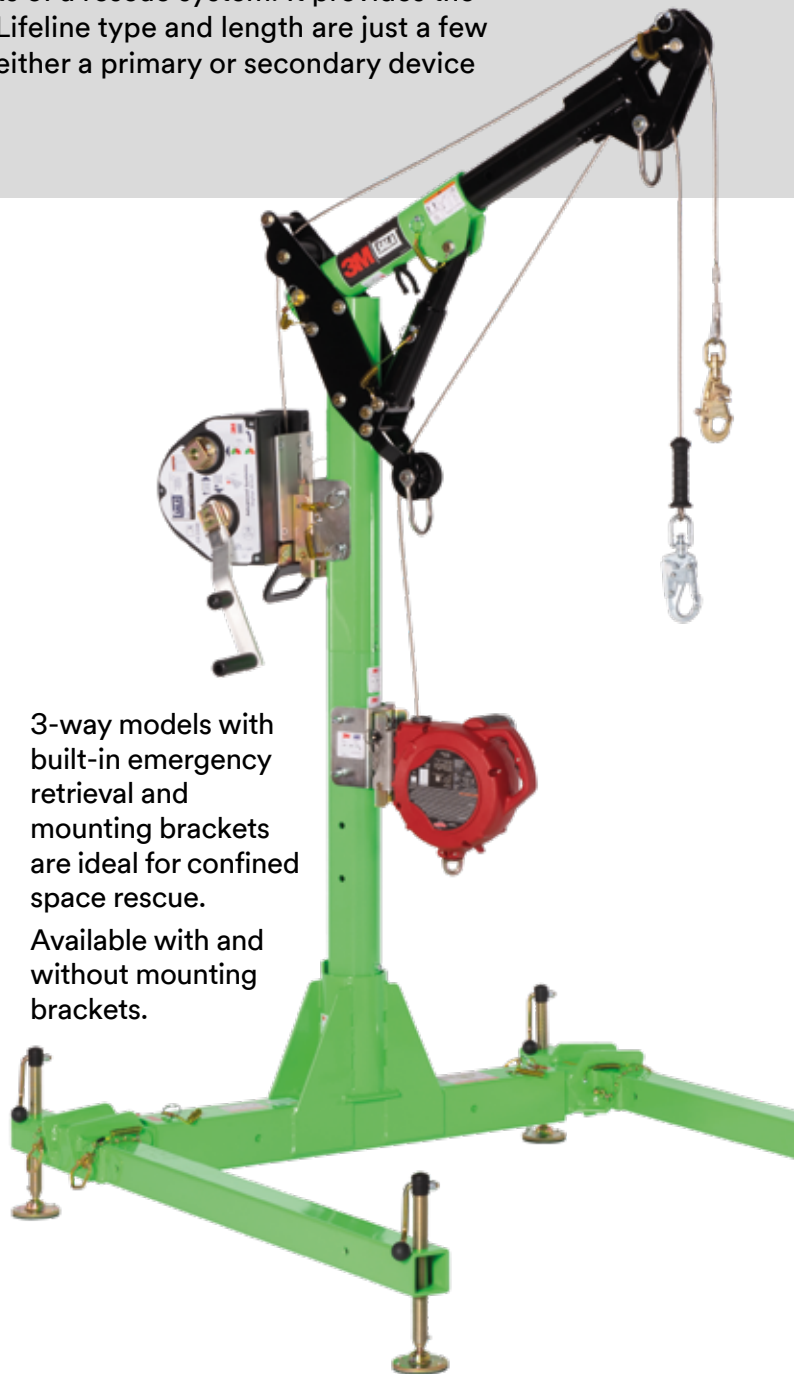

3-way models with built-in emergency retrieval and mounting brackets are ideal for confined space rescue.

Available with and without mounting brackets.

Trusted in the field

Safety engineers and site directors trust DBI-SALA® for the type of high quality, rugged systems that will ensure top performance when it is needed the most. Our systems meet applicable industry standards. We also customize solutions to suit customer needs.

Range Overview

Lifeline Material	Snap Hook Material	Retrieval Capability	RSQ™ Capability	140 kg Weight Capacity	4.5 m	9 m	15 m	25 m	40 m	53 m
Galvanised Cable (5 mm)	Steel			✓	3400828	3400803	3400950	3400866	3400971	3400656
			✓	✓				3400891		
		✓		✓		3400854	3400955	3400880		
		✓	✓	✓				3400916		
Stainless Steel Cable (5 mm)	Stainless Steel			✓	3400830	3400805	3400951	3400867	3400972	3400658
			✓	✓			3400961	3400892	3400997	
		✓		✓		3400856	3400956	3400881	3400986	
		✓	✓	✓			3400944	3400917		
Weight					5.5 kg	9 kg	14.5 kg	20 kg	27 kg	56.5kg
Housing Material					Aluminum	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum
Approximate Length					25 cm	29 cm	34 cm	39 cm	43 cm	43 cm
Approximate Width					19 cm	24 cm	27 cm	30 cm	35 cm	35 cm
Approximate Height					11 cm	14 cm	18 cm	18 cm	20 cm	31 cm
Retrieval Models*						✓	✓	✓	✓	
RSQ™ Model*							✓	✓	✓	
Fast-Line™ Field Replaceable Lifeline							✓	✓	✓	✓
140 kg Capacity					✓	✓	✓	✓	✓	✓
Meets IP69K					✓	✓	✓	✓	✓	✓
Carrying Handle					✓	✓	✓	✓	✓	✓
Pivoting Anchorage Loop					✓	✓	✓	✓	✓	✓
i-Safe™					✓	✓	✓	✓	✓	✓
Tripod/Davit Arm Bracket (Optional)						✓	✓	✓	✓	
Snap Hook (Patented)					✓	✓	✓	✓	✓	✓
- 1633 kg Rated Gate					✓	✓	✓	✓	✓	✓
- Self-Locking Gate					✓	✓	✓	✓	✓	✓
- Swiveling Hook					✓	✓	✓	✓	✓	✓
- Impact Indicator on Hook					✓	✓	✓	✓	✓	✓
- ANSI Z359.1/ Z359.12 Compliant					✓	✓	✓	✓	✓	✓
5 mm Diameter Wire Rope					✓	✓	✓	✓	✓	✓
Aluminium Housing					✓	✓	✓	✓	✓	✓
Stainless Steel End-Plate					✓	✓	✓	✓	✓	✓

* Option available on selected models. Please check with your customer service representative.

3M™ DBI-SALA® First-Man-Up™ Pole



3500202



3.00

(2.4 - 4.8 m) with Assisted Rescue Tool.

Repair Tool



9600037



0.50

Mounting Bracket



3401025



0.30

For 9 m, 15 m, 25 m and 40 m Sealed-Blok™.

Assisted Rescue Tool Only



3500200



0.50

If you already have a First-Man-Up™ Pole.

3M™ DBI-SALA® Saflok™ Steel Carabiner



2000112



0.25

Self Locking/Closing, 19 mm Gate Opening.

3M™ DBI-SALA® Saflok™ Steel Carabiner



2000113



0.60

Self Locking/Closing, 30 mm Gate Opening.

3M™ DBI-SALA® Saflok™ Steel Carabiner



2000114



0.66

Self Locking/Closing, 50 mm Gate Opening.

Cable Replacement Assembly for Fast-Line™



Stainless steel cable with stainless steel hook

15 m

25 m

40 m

53 m

3900107

3900111

3900114

3900170

Galvanised cable with plated hook

3900105

3900108

3900112

3900168

3M Belgium BVBA / SPRL

Hermeslaan 7
1831 Diegem
België / Belgique
E-mail: 3Msafety.be@mmm.com
www.3Msafety.be

3M Danmark

Hannemanns Allé 53
2300 København S
Danmark
E-mail: 3Msikkerhed@mmm.com
www.3Msikkerhed.dk

3M Deutschland GmbH

Carl-Schurz-Straße 1
D - 41453 Neuss
Deutschland
E-mail: arbeitsschutz.de@mmm.com
www.3Marbeitsschutz.de

3M Espana, S.A.

Juan Ignacio Luca de Tena, 19-25
28027 Madrid
Espana
E-mail: ohes.es@3M.com
www.3M.com/es/seguridad

3M France

Boulevard de l'Oise
95006 Cergy Pontoise Cedex
France
www.3M.com/fr/secure

3M Greece

20 Kifissias Ave.
151 25 Maroussi
Athens, Greece
www.3M.com/gr/occsafety

3M Ireland Limited

The Iveagh Building
The Park, Carrickmines
Dublin 18
Ireland
E-mail: ohes.helpline.uk@mmm.com
www.3M.co.uk/safety

3M Italia srl

Via Norberto Bobbio, 21
20096 Pioltello MI
Italia
E-mail: 3Msicurezza@mmm.com
www.3Msicurezza.it

3M Nederland B.V.

Molengraaffsingel 29
2629 JD Delft
Nederland
E-mail: 3Msafety.nl@mmm.com
www.3Msafety.nl

3M Norge A/S

Taerudgata 16
2004 Lilestrøm
Norge
E-mail: kundeservice@mmm.com
www.3M.no/vern

3M Österreich GmbH

Kranichberggasse 4
1120 Wien
Österreich
www.3M.com/at/arbeitschutz

3M Portugal

Rua do Conde Redondo, 98
1169-009 Lisboa
Portugal
www.3M.com/pt/seguranca

3M Suisse S.a r.l. / Schweiz GmbH

Eggstrasse 93
8803 Rüschiikon
Suisse / Schweiz
www.3M.com/ch/safety

Suomen 3M Oy

Keilaranta 6
02150 Espoo
Suomi
E-mail: tilaukset@mmm.com
www.3M.fi/suojaimet

3M Svenska AB

Bollstanäsvägen 3
191 89 Sollentuna
Sverige
E-mail: kundeservice@mmm.com
www.3M.se/personskydd

3M United Kingdom PLC

3M Centre
Cain Road
Bracknell
RG12 8HT
United Kingdom
E-mail: ohes.helpline.uk@mmm.com
www.3M.co.uk/safety

**Fall Protection****Registered Offices:**

Capital Safety (Northern Europe) Limited
3M Centre, Cain Road
Bracknell, Berkshire, RG12 8HT, UK

Capital Safety Group (EMEA)

Le Broc Center, Bâtiment A, Z.1. 1re Avenue
– BP15, 06511 Carros Le Broc, Cedex, FRANCE

Phone: +33 (0)4 83 58 08 08
Email: informationfallprotection@mmm.com
Web: 3M.com/FallProtection